# HIOKI



# INSULATION TESTERS

# Digital

### **DROP PROOF**



Built tough to withstand a 1-meter drop onto a concrete floor



# 5 ranges

Rated output voltage (DC)
Effective maximum indicated value

50 V / 100 MΩ

125 V / 250 MΩ

250 V / 500 MΩ

 $500~V\,/\,2000~M\Omega$ 

1000 V / 4000 MΩ

# Manage measurement data using Bluetooth® communication





Attach to enable Bluetooth® wireless technology



Transport to the Excel® file




|           | Location          | Gro.R | Ref. utilize | Mean, named<br>place | Value (BPS7) |        |
|-----------|-------------------|-------|--------------|----------------------|--------------|--------|
| · • •     |                   | L+R   | e swD        | 9-6                  | 301          | M Ohm  |
| X =       |                   |       |              | 94                   | **           | M Ohm  |
| $\Lambda$ |                   |       |              | 14                   | 191          | M Ohio |
|           | Risk Creditions A |       |              | .01                  | 184          | M Ohm  |
|           |                   |       |              | 3-1                  | 50.1         | M Chie |
|           |                   |       |              | 74                   | 10.9         | M Ohm  |
|           |                   |       |              |                      | -con iii     | 1000   |

Open an Excel® file and select a cell. The measured value being held on the instrument's display will be transferred to the computer and entered into the selected cell.


# Transport to GENNECT Cross





GENNECT Cross, a free app designed specifically for use with Hioki measuring instruments, lets you check and manage measurement results and create reports. The software provides a range of functionality that helps manage data in the field, including photographing measurement sites, placing measurement results on photographs, and saving handwritten memos.

# Significantly improve testing speed using test lead with remote switch



- 1 LED light shines a spotlight on the target
- 2 Red light warns of live voltage detection
- 3 Measurement start switch
- 4 Identify pass/fail decisions with red or green light

TEST LEAD SET WITH REMOTE SWITCH L9788-11 (Option) \*Standard with the IR4056-21, Not CE Marked

# Identify PASS / FAIL using light and sound



Compare measured values to pre-set reference values to generate a pass or fail decision with the Comparator function.

# Convenient for inspections

# ■ Low resistance measurement<sup>1</sup>

Perform EV and HEV continuity checks as well as resistance measurement of protective conductors in facility electrical equipment as defined by IEC 60364.

# ■ AC/DC voltage measurement

Automatically detect AC or DC for testing. Use as a tester thanks to DC voltage measurement functionality.

# PV Ω dedicated function<sup>2</sup>

Measurement is not affected even when the PV system is online.

1. Excludes IR4053 2. IR4053 Only

# **One-touch Start and Stop**



Measurement voltage is applied while MEASURE key is pressed

# Continuous test

Lift and lock the MEASURE key to apply a continuous stream of voltage

# **Prevent Accidental High Voltage Generation**





Under [500V], [1000V], or [PV $\Omega$ ] settings, the RELEASE button will blink. Press to unlock the release of high voltages as an extra safety meaure.

# **Lineup - Digital**

Product warranty for 3 years Accuracy guaranteed for 1 year

| -  |  | Low voltage (less than 1000 V)                      |   |  |   | High voltage (less than 5000 V) |  |  |
|--|--|---|---|--|---|---------------------------------|--|--|
| Measurement type   | Standard   | High-speed  | EV  | Ι  | V   | Standard                        |  |  |
| Model  | IR4056-20<br>IR4056-21                                     | IR4057-50   | IR4059  | IR4053-10  | IR5051  | IR5050                          |  |  |
| Appearance   | TOOL ST.   | 4000  | New   | Aggod  | New   | New                             |  |  |
| Number of ranges   |  |   | 5   |  |   | 5                               |  |  |
| Testing voltage (DC) /<br>Effective maximum<br>indicated value |  | 50 V /<br>125 V /<br>250 V /<br>500 V /<br>1000 V / | 250 V /500 GΩ<br>500 V /1.00 TΩ<br>1000 V /2.00 TΩ<br>2500 V /5.00 TΩ<br>5000 V /10.00 TΩ |  |   |                                 |  |  |
| PV Ω measurement   | N / A 500 V / 2000 MΩ<br>1000 V / 4000 MΩ                  |   |   |  | 500 V /100 GΩ<br>1000 V /100 GΩ<br>1500 V /100 GΩ | N/A                             |  |  |
| Leakage current measurement                                    |  | N   |   | 0.00 nA to 3.00 mA   |   |                                 |  |  |
| DC voltage measurement   | 600 V 1000 V   |   |   |  | 2000 V  |                                 |  |  |
| AC voltage measurement   |  | 60  | 0 V   |  | 1000 V  |                                 |  |  |
| Low resistance measurement                                     |  | <b>~</b>  |   | N/A  | N/A   |                                 |  |  |
| Displaying 1-min. values                                       | N/A  | (   | <b>/</b>  | N/A  | <i>V</i>  |                                 |  |  |
| Comparator decision response time                              | 0.8 second   | ,   | econd   | 0.8 second (PV : 4 second)   | V   |                                 |  |  |
| AUTO power save  |  | (   | /   |  | <i>V</i>  |                                 |  |  |
| Bluetooth® communication                                       | N/A  | ✓ (With   | n Z3210)  | N/A  | ✓ (With Z3210)                                    |                                 |  |  |
| Resistance gauge   | N/A  |   | /   | N/A  | <i>V</i>  |                                 |  |  |
| Backlight  |  | 1   | /   |  | ٠   | /                               |  |  |
| Safety standard category                                       |  | CAT II  |   | CAT IV 1000 V<br>CAT III 2000 V  |   |                                 |  |  |
| CE   | V1 V   |   |   |  |   |                                 |  |  |
| Dustproof and waterproof                                       | IP40 <sup>2</sup> IP40 <sup>2, 3</sup> , IP65 <sup>4</sup> |   |   |  |   |                                 |  |  |
| Drop proof   | V  |   |   |  |   | N / A                           |  |  |
| Power supply   |  | LR03 (AAA) alk<br>HR6 (AA) NiMH red                 |   | LR6 (AA) alkaline battery × 8<br>HR6 (AA) NiMH rechargeable battery x8 |   |                                 |  |  |
| Dimensions<br>( W × H × D )                                    | 159 × 177<br>6.26 × 6.97                                   |   | 160 × 98 × 46 mm<br>6.30 × 3.86 × 1.81 in.  | 159 × 177 × 53 mm<br>6.26 × 6.97 × 2.09 in.                            |   |                                 |  |  |
| Weight   | 600 g (21.2 oz)  | 640 g (22.6 oz)                                     | 536 g (18.9 oz)   | 600 g (21.2 oz)  | 1.7 kg (59.97 oz)                                 |                                 |  |  |
|  |  |   |   |  |   |                                 |  |  |

# **INSULATION TESTER IR4056-20, IR4056-21**

**C** € \* IR4056-20 only Product warranty for 3 years Accuracy guaranteed for 1 year





With • TEST LEAD L9787

Neck strap LR6 alkaline battery ×4 Instruction manual







- With
   TEST LEAD SET WITH
  REMOTE SWITCH L9788-11
- Neck strap
   LR6 alkaline battery ×4

IR4056-21 Not CE marked









Comparator decision response time: 0.8 s

5 ranges

CAT III 600 V

# **INSULATION TESTER IR4057-50, IR4059**



IR4057-50



IR4059



L4938





WIRELESS ADAPTER Z3210 (Option) Attach to enable Bluetooth® wireless technology

With Z3210





Cross







**C** € c ® \* IR4057-50 only Product warranty for 3 years Accuracy guaranteed for 1 year



Comparator decision response time: 0.3 s

Digital bar graph

5 ranges

CAT III 600 V

- Included accessories

   CONNECTION CABLE L4930
   ALLIGATOR CLIP SET L4935
   TEST PIN SET L4938
   TEST LEAD SET WITH REMOTE SWITCH
  (RED) L9788-10 (IR4059 only)
   PROTECTOR Z5042 (IR4059 only)
   Neck stra

- Neck strap
   LR6 alkaline battery ×4
- Instruction manual

# INSULATION TESTER (For Photovoltaic Generation Systems) IR4053-10

Product warranty for 3 years Accuracy guaranteed for 1 year





- With TEST LEAD L9787
- Neck strap
   LR6 alkaline battery ×4
   Instruction manual

IR4053-10











Comparator decision response time: 0.8 s

Comparator decision response time (PV): 4 s

5 ranges

CAT III 600 V

| Mo     | odel                       | IR4056-20 | IR4056-21                             | IR4057-50                              | IR4059                                      | IR4053                             |                                     |                             |              |               |                  |                     | Basic accuracy      |
|--------|----------------------------|-----------|---------------------------------------|--|---|------------------------------------|-------------------------------------|-----------------------------|--------------|---------------|------------------|---------------------|---------------------|
| Insula |                            |           |                                       |  | Testing voltage (DC)                        | 50 V                               | 125 V                               | 250 V                       | 500 V        | 1000 V        | -                |                     |                     |
|        | Insulation                 | ulation   | _                                     | Effective maximum indicated value (MΩ) | 100   | 250                                | 500                                 | 2000                        | 4000         | -             |                  |                     |                     |
| ≥      | resistance                 | ٠ ا       | \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ | •                                      | 1st effective measuring range (MΩ)          | 0.200 to 10.00                     | 0.200 to 25.0                       | 0.200 to 50.0               | 0.200 to 500 | 0.200 to 1000 | ±2% rdg. ±2 dgt. |                     |                     |
| as     |                            |           |                                       |  | 2nd effective measuring range (MΩ)          | 10.1 to 100.0                      | 25.1 to 250                         | 50.1 to 500                 | 501 to 2000  | 1010 to 4000  | ±5% rdg.         |                     |                     |
| ᇤ      |                            | N/A       |                                       | Testing voltage (DC)                   | 50  | 0 V                                |                                     | 1000 V                      |              | -             |                  |                     |                     |
| ă      | ΡV Ω                       |           |                                       | ,                                      | Effective maximum indicated value (MΩ) 2000 |                                    | 00                                  | 4000                        |              |               | -                |                     |                     |
| ž      | measurement                |           | IN.                                   | \'\A                                   | "   | 1st effective measuring range (MΩ) | 0.200                               | to 500                      |              | 0.200 to 1000 |                  | ±4% rdg.            |                     |
| par    |                            |           |                                       |  | 2nd effective measuring range (MΩ)          | 501 to                             | 2000                                |                             | 1010 to 4000 |               | ±8% rdg.         |                     |                     |
| me,    | DC Voltage                 |           | N.                                    | / A                                    |   | ~                                  | 1.200 V/42.00 V/420.0 V/1000 V      |                             |              |               |                  |                     | ±1.3% rdg. ±4 dgt.1 |
| ete    | DC voltage                 |           | ·                                     | /                                      |   | N/A                                | / A   4.200 V/42.00 V/420.0 V/600 V |                             |              |               |                  | ±1.3% rdg. ±4 dgt.1 |                     |
| S      | AC Voltage                 |           | ·                                     | /                                      |   | ~                                  | 420.0 V <sup>2</sup> /600 V         | 420.0 V <sup>2</sup> /600 V |              |               |                  |                     | ±2.3% rdg. ±8 dgt.1 |
|        | Low resistance measurement |           |                                       | <u> </u>                               |   | N/A                                | 10.00 Ω/100.0 Ω/1000 Ω              |                             |              |               |                  | ±3% rdg. ±2 dgt.    |                     |

|       | Operating temperature                     | IR4056-20, IR4056-20, IR4057-50, IR4059: -25°C to 65°C, 90% RH or less (non-condensating) IR4053: 0°C to 50°C, 90% RH or less (non-condensating)    |
|-------|---|---|
|       | Storage temperature                       | IR4056-20, IR4056-20, IR4057-50, IR4059: -25°C to 65°C, 90% RH or less (non-condensating) IR4053: -10 °C to 50°C, 90% RH or less (non-condensating) |
| _     | Dustproof and waterproof                  | IP40 (Terminal excluded)  |
| Other | Standards                                 | EN61326 (EMC), EN61557-1/-2/-43/-10   |
| P.    | Power supply<br>Continuous operating time | LR6 alkaline battery ×4<br>20 hours   |
|       | Dimensions (W. H. D.)                     | IR4056-20, IR4056-21, IR4057-50, IR4053-10: 159 x 177 x 53 mm (6.26 x 6.97 x 2.09 inch)   |
|       | Dimensions ( W × H × D )                  | IR4059: 160 x 98 x 46 mm (6.30 x 3.86 x 1.81 inch)  |
|       | Weight                                    | IR4056-20, IR4056-21. IR4053: 600 g (21.2 oz)<br>IR4059: 536 (18.9 oz)<br>IR4057-50: 640 g (22.6 oz)  |

- Ranges in excess of 600 V/1000 V are outside the accuracy guarantee
   Minimum indicated value: 30.0 V
   Subclause 4.3 of Part 4 (interchanging of test leads) is not applicable when L9788-10 is used

IR4056-20 Order code IR4056-21 Order code IR4057-50 Order code IR4057-90 Order code IR4059 Order code IR4053-10 Order code Z3210

Model IR4057-90 includes Z3210 as a set

# HIGH VOLTAGE INSULATION TESTER IR5050, IR5051

Product warranty for 3 years Accuracy guaranteed for 1 year



IR5050

IR5051 IR5051-90

(Include Z3210 as a set)

**Standard** 

For PV systems

5 ranges

**CAT IV 1000 V, CAT III 2000 V** 

IR5050 Order code

IR5051 Order code IR5051-90 Order code

### Included accessories



- TEST LEAD L9850-01 (Red), -02 (Black), -03 (Blue), 3 m (9.84 ft.) ALLIGATOR CLIP L9851-01 (Red), -02 (Black) ,-03 (Blue)
- CARRYING CASE C0212
- LR6 alkaline battery ×8
- Instruction manual TEST PIN SET L9852 (IR5051 and IR5051-90 only)
- · WIRELESS ADAPTER Z3210 (IR5051-90 only) L9850, L9851

### 0.00 MΩ to 500 GΩ 500 V 0.00 MΩ to 1.00 TΩ Testing voltage (DC) 1000 \ 0.00 MΩ to 2.00 TΩ measuring range 2500 V $0.00~\text{M}\Omega$ to $5.00~\text{T}\Omega$ Insulation 5000 V 0.00 MΩ to 10.00 TΩ resistance Rated current 1 mA to 1.2 mA Measurement 2 mA or less Short-circuit current ±5% rdg. ±5 dgt., ±20% rdg. Accuracy Induced noise removal 3 mA max 10 nA/ 100 nA/ 1000 nA/ 10 μA/ 100 μA/ 1 mA Guaranteed accuracy range: 1.00 nA to 3.00 mA Accuracy: ±3% rdg. ±3 dgt. Leakage current ±10 V to ±2000 V DC voltage Accuracy: ±3% rdg. ±3 dgt 30 V to 1000 V AC voltage Accuracy: ±3% rdg. ±3 dgt 100 nF/ 1000 nF/ 10 μF Capacitance Guaranteed accuracy range: 10.0 nF to 25.0 μF Accuracy: ±10% rdg. ±5 nF 500 V 0.00 MQ to 100 GQ PV insulation resistance 1000 V $0.00~\text{M}\Omega$ to $100~\text{G}\Omega$ (IR5051 only) 1500 V $0.00~\text{M}\Omega$ to $100~\text{G}\Omega$ -20°C to 40°C, less than 80% RH (no condensation) Operating temperature and humidity range 40°C to 45°C, less than 60% RH (no condensation) 45°C to 50°C, less than 50% RH (no condensation) Storage temperature and -25°C to 65°C, less than 80% RH (no condensation) humidity range IP401, IP65 (CARRYING CASE C0212) Dustproof/waterproof EN IEC61010 (safety), EN61326 (EMC), Standards IEC61557-1, -2 (insulation resistence tester) LR6 (AA) alkaline battery x8:

CATS

# Accurate, easy-to-use insulation resistance meter

# **CAT III 2000 V**

# **CAT IV 1000 V**

### Start: Press and hold for 1 sec











# Never miss a change in measurement.

Weight

Power supply

Continuous operating time

Dimensions ( W × H × D )

# During measurement:

Simultaneous display of test voltage, insulation resistance and leakage current


### After measurement:

Insulation indexes (PI, DAR, DD) and capacitance can be displayed.

Failures caused by the application of a high voltage can be prevented.

Keep the applied voltage as low as possible





# Precision stability in high voltage insulation testing

Approx. 4 hours with Z3210 installed and using wireless communication

• HR6 (AA) nickel-metal hydride (NiMH) rechargeable battery ×8

195mm (7.68 in.) × 254 mm (10 in.) × 89 mm (3.50 in.)

Approx. 5 hours without Z3210 installed



1.7 kg (59.97 oz.)

Shielded wire minimizes measurement variability

**GUARD terminal** minimizes the effects of leakage current flowing through the insulation's surface.



. Minuscule current measurement technology

### Wireless communication for even greater convenience









# Measure insulation resistance while the solar PV system continues to generate IR5051 IR4053 Up to 2000V Up to 600V

Step voltage

Ramp voltage

### PV insulation resistance measurement function

In the past, it was impossible to measure a PV system's insulation resistance while the system was operating because the measurement current and generated current would mix together. Consequenly, it was necessary to make such measurements at night, when the system being measured was not generating electricity.

The PV insulation resistance measurement function can measure PV systems while they're operating during daylight hours, without being affected by the generated current.

<sup>1.</sup> With protector attached, excluding terminals

# Analog Meters

# **DROP PROOF**



Built tough to withstand a 1-meter drop onto a concrete floor



Single range IR4016-20 IR4017-20 IR4018-20

> 3 range 3490

# See better in the dark



Bright LED

# Significantly improve testing speed using test lead with remote switch





L9788-11 (Option)

- Start and stop the test at the touch of a button
- · Illuminate the test location with a bright white LED
- Work safely knowing that when the RED is lit, live wires, high voltage or electrical discharge is present

# **Check for Live Circuits**



The LIVE CIRCUIT LED will light up in red whenever the voltage exceeds 20 V AC between the LINE and EARTH terminals, and when at least 20 V DC is still remaining during the auto discharge.

# **One-touch Start and Stop**



Measurement voltage is applied while MEASURE key is pressed



Lift and lock the MEASURE key to apply a continuous stream of voltage

# Check the Battery Status







# **Lineup - Analog Meters**

Product warranty for 3 years Accuracy guaranteed for 1 year

|                        |           |             | 005 01 02 05 1 2 5 10 20 50 100 MΩ   | Testing voltage (DC)              |   | 500 V  |   |  |
|------------------------|-----------|-------------|--|-----------------------------------|---|--|---|--|
|                        |           | IR4016      | 400 Z00  | Effective maximum indicated value |   | 100 ΜΩ   |   |  |
|                        |           | -20         |  | 1st effective measuring range     |   | 0.1 MΩ to 50   | ΜΩ  |  |
|                        |           |             | ( ; ; c  | 2nd effective<br>measuring range  |   | 0.01 M $\Omega$ to 0.1 M 50 M $\Omega$ or more to                                |   |  |
|                        |           |             | 5 10 20 50 100 200<br>0 5 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1  | Testing voltage (DC)              | 500 V   |  |   |  |
|                        | 1         | IR4017      | 200 × 100 × 1  | Effective maximum indicated value |   | 1000 ΜΩ  |   |  |
|                        | Range     | -20         |  | 1st effective measuring range     |   | 1 MΩ to 500  | ΜΩ  |  |
| Meas                   |           |             | 10 10 10 10 10 10 10 10 10 10 10 10 10 1   | 2st effective<br>measuring range  |   | 0.5 M $\Omega$ to 1 M $\Omega$ or less 500 M $\Omega$ or more to 1000 M $\Omega$ |   |  |
| Measurement parameters |           |             | 3 10 20 50 500 1000<br>MS2   | Testing voltage (DC)              |   | 1000 V   |   |  |
| rameters               |           | IR4018      |  | Effective maximum indicated value | 2000 ΜΩ                                       |  |   |  |
| ı                      |           | -20         |  | 1st effective measuring range     | $2~\text{M}\Omega$ to 1000 $\text{M}\Omega$   |  |   |  |
|                        |           |             |  | 2nd effective<br>measuring range  |   | 1 M $\Omega$ to 2 M $\Omega$ or less 1000 M $\Omega$ or more to 2000 M $\Omega$  |   |  |
|                        |           |             | 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0  | Testing voltage (DC)              | 250 V   | 500 V  | 1000 V                                      |  |
|                        | 3         | 2400        | 13 23 2 31 30 30 31 30 30 30 30 30 30 30 30 30 30 30 30 30 | Effective maximum indicated value | 100 ΜΩ  |  | 4000 ΜΩ                                     |  |
|                        | Ranges    | 3490        |  | 1st effective measuring range     | $0.05~\text{M}\Omega~$ to $50~\text{M}\Omega$ |  | 2 MΩ to 1000 MΩ                             |  |
|                        |           |             | 0  | 2nd effective<br>measuring range  | 0.01 MΩ to 0.05 MΩ or less<br>50 MΩ to 100 MΩ |  | 0.5 MΩ to 2 MΩ<br>1000 MΩ to 4000 MΩ        |  |
|                        | Accuracy  | (Insulation | )  |                                   |   |  | tive measuring range) tive measuring range) |  |
|                        | AC Voltaç | ge          |  |                                   |   | 0 to 600 v   | V   |  |
|                        | 0 "       |             | 000 to 4000, 000/ PH and a   |                                   | Acces   | sories   |   |  |


|       | Operating temperature                     | 0°C to 40°C, 90% RH or less (non-condensating)  |
|-------|---|---|
|       | Storage temperature                       | -10°C to 50°C, 90% RH or less (non-condensating)  |
|       | Dustproof and waterproof                  | IP40 (Excludes measuring terminals)   |
|       | Drop proof                                | YES   |
|       | Backlight                                 | YES   |
| Other | Safety standard category                  | CAT III 600 V   |
| ¥ .   | Standards                                 | EN61010 (Safety), EN61326 (EMC)   |
|       | Power supply<br>Continuous operating time | LR6 alkaline battery ×4<br>20 hours   |
|       | Dimensions( W $\times$ H $\times$ D )     | IR4016, IR4017, IR4018: $162 \times 182 \times 57$ mm ( $6.38 \times 7.17 \times 2.24$ in) 3490: $162 \times 167 \times 52$ mm ( $6.38 \times 6.57 \times 2.05$ in) |
|       | Weight                                    | IR4016, IR4017, IR4018: 820 g (28.9 oz), 3490: 840 g (29.6 oz)  |

# Accessories



- TEST LEAD L9787 (1.2 m)
- Neck strap
   LR6 alkaline battery ×4
   Instruction manual

IR4016-20 Order code IR4017-20 Order code [R4018-20] Order code 3490 Order code

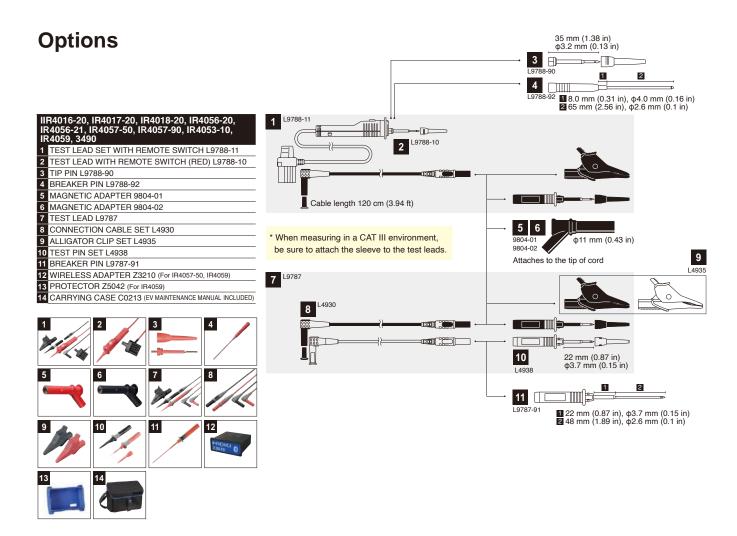

| IR5050, IR5051                    |                         |
|-----------------------------------|-------------------------|
| 1 TEST LEAD L9850 -01             | Red, 3 m (9.84 ft.)     |
| 2 TEST LEAD L9850 -02             | Black, 3 m (9.84 ft.)   |
| 3 TEST LEAD L9850 -03             | Blue, 3 m (9.84 ft.)    |
| 4 TEST LEAD L9850 -11             | Red, 10 m (32.81 ft.)   |
| 5 TEST LEAD L9850 -12             | Black, 10 m (32.81 ft.) |
| 6 TEST LEAD L9850 -13             | Blue, 10 m (32.81 ft.)  |
| 7 ALLIGATOR CLIP L9851 -01        | Red                     |
| 8 ALLIGATOR CLIP L9851 -02        | Black                   |
| 9 ALLIGATOR CLIP L9851 -03        | Blue                    |
| 10 TEST PIN SET L9852             | Red and black           |
| 11 CARRYING CASE C0212            |                         |
| 12 WIRELESS ADAPTER Z3210         |                         |
| 13 COMMUNICATION PACKAGE DT4900-0 | 1 USB                   |





Note: Company names and product names appearing in this brochure are trademarks or registered trademarks of various companies.

DISTRIBUTED BY

# HEADQUARTERS

81 Koizumi, Ueda, Nagano 386-1192 Japan https://www.hioki.com/

